


AC

POST TOP

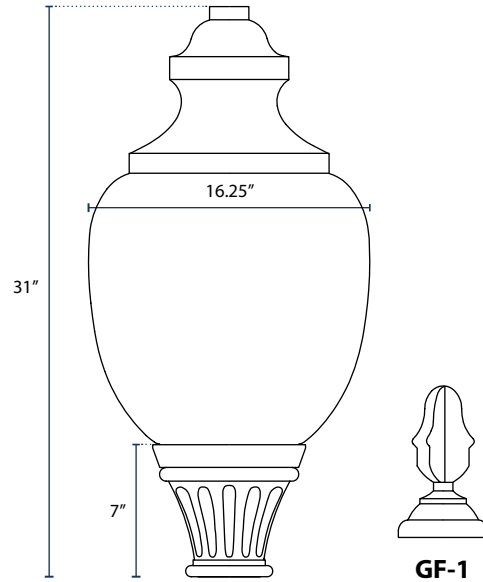

SPECIFICATIONS

Casting

Cast Aluminum
(Globeholder)

Fasteners

Stainless Steel

Mounting

3.1" Inside Diameter

Pole

Fits all Brandon Industries 3"
and 4" poles and 5" poles with
a tenon

Globe

27A Acrylic Acorn

Finish

Polyester Powder-Coat
Electrostatically
Applied & Thermocured

Post Top

LED
Height: 31"
Width: 16.25"

Efficiency

Integrated LED: 110 lm/W
Removable LED Bulb: 120-140 lm/W

Post Top EPA

1.228 ft²

ORDERING

POST TOP	LAMP TYPE	OPTICS	WATTAGE	CCT	FINISH	OPTIONS
AC						
	INT Integrated LED	TYPE V	30W 50W	30 3000K 40 4000K 50 5000K	BK Black DB Dark Bronze GN Dark Green VG Verde Green	PC Photocell GF-1 Finial
	CC Removable LED Bulb	TYPE V	18W 27W 36W 54W			
	MED Medium Socket Only MOG Mogul Socket Only	LEAVE BLANK	LEAVE BLANK			

ENERGY CHART

LAMP TYPE	WATTAGE	LUMEN	LM/W
INT	30W	3,300	110lm/w
INT	50W	5,500	110lm/w
CC	18W	2,520	140lm/w
CC	27W	3,800	140lm/w
CC	36W	5,000	140lm/w
CC	54W	7,600	140lm/w