


AMF2

POST TOP

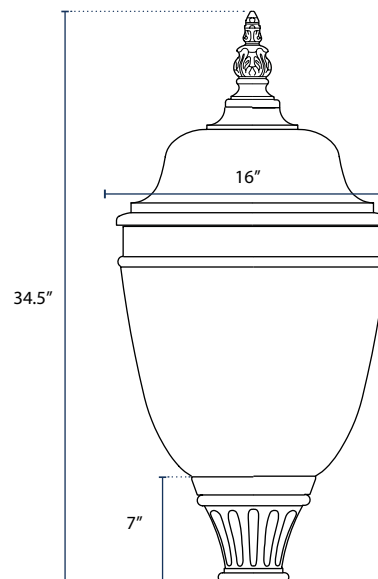

SPECIFICATIONS

Casting

Cast Aluminum
(Globeholder)

Fasteners

Stainless Steel

Mounting

3.1" Inside Diameter

Pole

Fits all Brandon Industries 3"
and 4" poles and 5" poles with
a tenon

Globe

Type III Prismatic

Finish

Polyester Powder-Coat
Electrostatically
Applied & Thermocured

Post Top

LED
Height: 34.5"
Width: 16"

Efficiency

Integrated LED: 110 lm/W
Removable LED Bulb: 120-140 lm/W

Post Top EPA

1.464 ft²

ORDERING

POST TOP	LAMP TYPE	OPTICS	WATTAGE	CCT	FINISH	OPTIONS
AMF2						
	INT Integrated LED	TYPE III	30W 50W	30 3000K 40 4000K 50 5000K	BK Black DB Dark Bronze GN Dark Green VG Verde Green	PC Photocell
	CC Removable LED Bulb	TYPE III	18W 27W 36W 54W			
	MED Medium Socket Only MOG Mogul Socket Only	LEAVE BLANK	LEAVE BLANK			

ENERGY CHART

LAMP TYPE	WATTAGE	LUMEN	LM/W
INT	30W	3,300	110lm/w
INT	50W	5,500	110lm/w
CC	18W	2,520	140lm/w
CC	27W	3,800	140lm/w
CC	36W	5,000	140lm/w
CC	54W	7,600	140lm/w