


B-5R2

BOLLARD

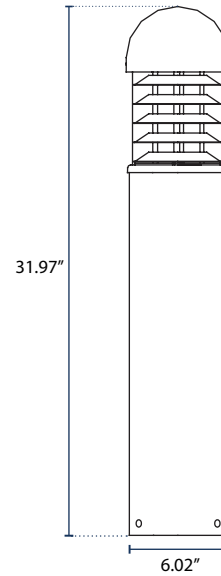

SPECIFICATIONS

Casting

Extruded Aluminum

Mounting

Qty. (3) 3/8"x16" Anchor Bolts
Surface

CRI

>70

Beam Angle

120°

LED's

Available Upon Request

Voltage

120-277V

Warranty

5-Year

Socket Size

E26 Medium

Finish

Die-Cast Aluminum

Lamp Type

LED A19 Bulb

Efficiency

15 lm/W

ORDERING

BOLLARD	CCT	WATTAGE	VOLTAGE	FINISH
B-5R2		12W	100-277V	
	3000K			DB Dark Bronze
	4000K			BK Black
	5000K			