BRANDON® INDUSTRIES


NAME: DATE:

PROJECT:

B-8L2

BOLLARD



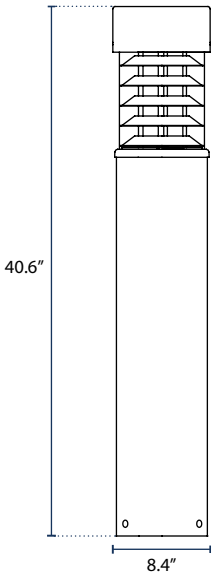

SPECIFICATIONS

Casting
Extruded Aluminum

Driver
Meanwell

LED's
Available Upon Request

Finish
Die-Cast Aluminum

Mounting
Qty. (3) 3/8″x16″ Anchor Bolts
Surface

Voltage
120-277V

CRI
>70

Warranty
5-Year

Beam Angle
150°

Efficiency
70 lm/W

Lamp Type
Integrated LED Board

ORDERING

BOLLARD	CCT	WATTAGE	VOLTAGE	FINISH
B-8L2			**100-277V**	
	3000K	**25W**		**DB** Dark Bronze
	4000K	**35W**		**BK** Black
	5000K			