


PT-M8

POST TOP

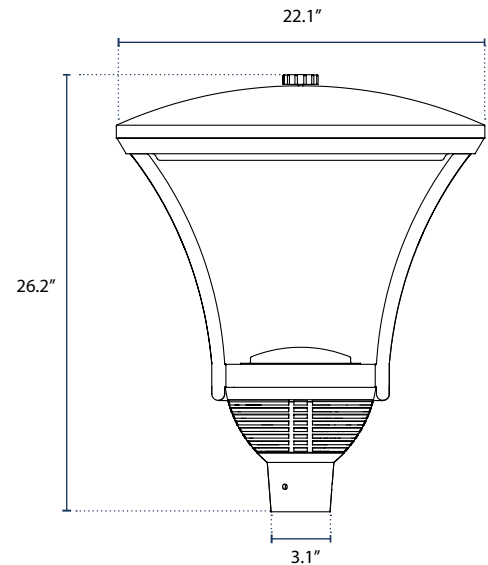

SPECIFICATIONS

Casting

Die Cast Aluminum

Post Top EPA

0.89 ft²

Driver

Meanwell

LED's

Available Upon Request

Finish

Polyester Powder-Coat
Electrostatically
Applied & Thermocured

Mounting

3" Inside Diameter

Post Top

Height: 26.2"
Width: 22.1"

Pole

Fits all Brandon Industries
3" and 4" poles and 5" poles
with a tenon

Lamp Type

Integrated LED Board

Voltage

120-277V

CRI

>70

Distribution

Type IV & Type V

Efficiency


90-110 lm/W

ORDERING

POST TOP	CCT	WATTAGE	OPTICS	FINISH
PT-M8				
	3000K 4000K 5000K	30W 45W 60W	TYPE IV TYPE V	BK Semi Gloss Black DB Textured Dark Bronze

PT-M9

POST TOP

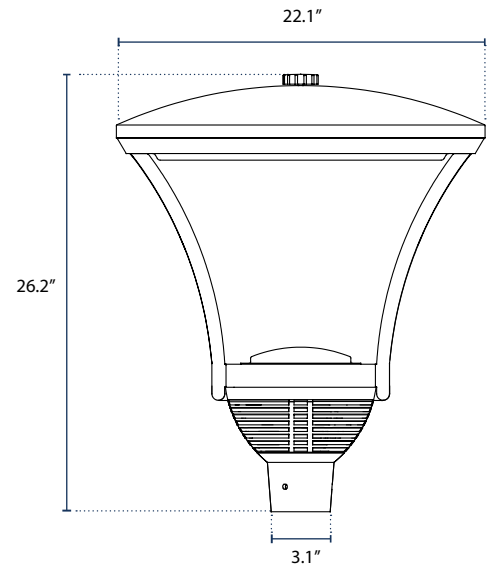

SPECIFICATIONS

Casting

Die Cast Aluminum

Post Top EPA

0.89 ft²

Driver

Meanwell

LED's

Available Upon Request

Finish

Polyester Powder-Coat
Electrostatically Applied
& Thermocured

Mounting

3" Inside Diameter

Post Top

Height: 26.2"
Width: 22.1"

Pole

Fits all Brandon Industries
3" and 4" poles and 5" poles
with a tenon

Lamp Type

Integrated LED Board

Voltage

100-277V

CRI

>70

Distribution

Type IV & Type V

Efficiency

90-110 lm/W

ORDERING

POST TOP	CCT	WATTAGE	OPTICS	FINISH
PT-M9				
	3000K 4000K 5000K	70W 80W 100W 120W	TYPE IV TYPE V	BK Semi Gloss Black DB Textured Dark Bronze